

## DESCRIPTION

This 5CCT 3Wattage Commercial Downlight is 15 in 1, available in 3 wattages and 5 CCT tunable. 120-277V input voltage, 0-10V dimming.

Wet-location and IC rated, ideal use for commercial complexes, hospitality, healthcare industry, schools, shopping centers, industrial areas and hotels.

Available size: 6", 8", 10"



## FEATURES

- High luminous efficacy, up to 100LM/W
- High quality Aluminium shell with frosted PC diffuser
- Color removable trim available (sold separately): Brushed nickel, Black, Bronze

## INSTALLATION

Easy fit installation, spring-action housing clips. Suitable for most new constructions.

## DIMMING

Supports 0-10V dimming from 100% to 10%.

## ELECTRICAL

This fixture is built with the highest quality drivers, ensuring energy efficiency.

## SPECIFICATION

- Model: 10CMCT38LR05
- Size: 10inch
- Wattage: 22W-30W-38W
- Lumens: 2356Lm-3141Lm-3892Lm
- Voltage: 120-277V
- Power Frequency: 50/60Hz
- Power Factor: >0.9
- 5CCT: 2700K/3000K/3500K/4000K/5000K
- CRI: 90
- Beam Angle: 100°
- Material: AL+PC
- Lifespan: ≥50,000hours
- Operating Temp: (-4°F~ 113°F) -20~45°C
- Dimmable: 0-10V dimming
- Rating: Suitable for Wet Locations
- Warranty: 5 year limited

## ENERGY SAVINGS

80% more energy savings than halogen lamps.

## LISTING

ETL Listed. FCC.Title24.




## Product View




### Selectable wattage

6inch:12W-17W-22W  
8inch:17W-24W-30W  
32W-42W-52W  
10inch:22W-30W-38W


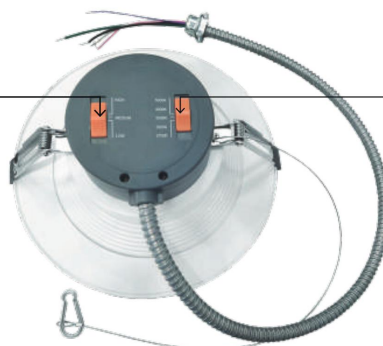


### Selectable CCT

2700K, 3000K, 3500K, 4000K, 5000K



## DIMENSION

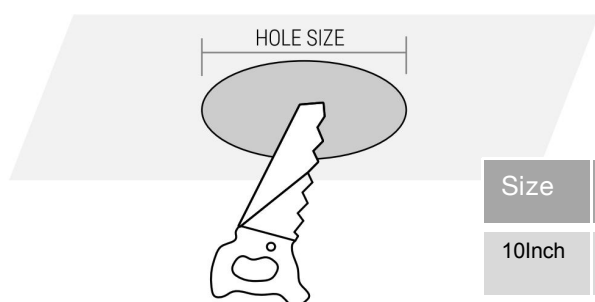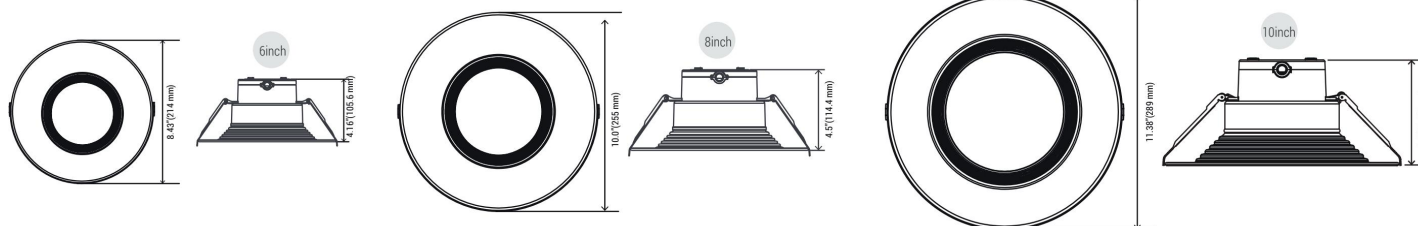

Size	Hole Size
10Inch	8 31/32" (228mm)

## RECOMMENDED DIMMER

### LUTRON

RMJS-8T-DV-B  
Diva DVSTV  
MS-Z101-WH  
DVSTV-WH

### LEGRAND

RH4FBL3PW

## TRIM RING REPLACEMENT (SOLD SEPARATELY)



Brushed nickel




Black



Bronze

## ACCESSORIES



Hole cutout card



Wire nuts