

DESCRIPTION

This 5CCT 3Wattage Commercial Downlight is 15 in 1, available in 3 wattages and 5 CCT tunable. 120-277V input voltage, 0-10V dimming.

Wet-location and IC rated, ideal use for commercial complexes, hospitality, healthcare industry, schools, shopping centers, industrial areas and hotels.

Available size: 6", 8", 10"



FEATURES

- High luminous efficacy, up to 100LM/W
- High quality Aluminium shell with frosted PC diffuser
- Color removable trim available (sold separately): Brushed nickel, Black, Bronze

INSTALLATION

Easy fit installation, spring-action housing clips. Suitable for most new constructions.

DIMMING

Supports 0-10V dimming from 100% to 10%.

ELECTRICAL

This fixture is built with the highest quality drivers, ensuring energy efficiency.

SPECIFICATION

Model: 6CMCT22LR05

Size: 6inch

Wattage: 12W-17W-22W

Lumens: 1296Lm-1694Lm-2194Lm

Voltage: 120-277V

Power Frequency: 50/60Hz

Power Factor: >0.9

5CCT: 2700K/3000K/3500K/4000K/5000K

CRI: 90

Beam Angle: 100°
Material: AL+PC

Lifespan: ≥50,000hours

Operating Temp: (-4°F~ 113°F) -20~45°C

Dimmable: 0-10V dimming

Rating: Suitable for Wet Locations

Warranty: 5 year limited

ENERGY SAVINGS

80% more energy savings than halogen lamps.

LISTING

ETL Listed. FCC. Title 24.


















Product View

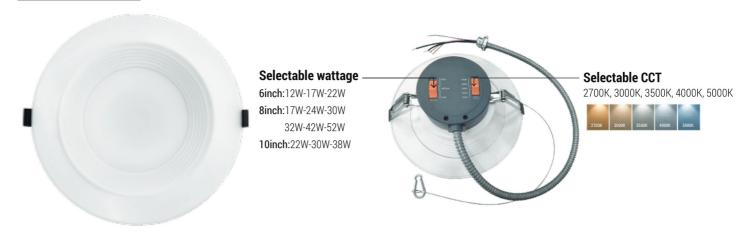

DIMENSION

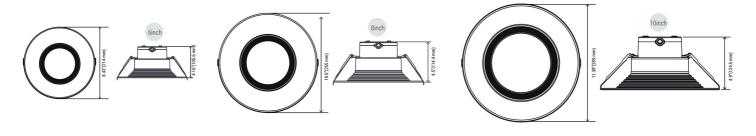

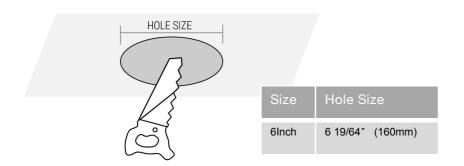

RECOMMENDED DIMMER	
LUTRON	LEGRAND
RMJS-8T-DV-B Diva DVSTV MS-Z101-WH DVSTV-WH	RH4FBL3PW

TRIM RING REPLACEMENT (SOLD SEPARATELY)



Brushed nickel





Black



Bronze

ACCESSORIES





Hole cutout card

Wire nuts