

DESCRIPTION

Smart slim panel only 0.37" thickness. Support remotely control, when you go out and forget to turn off the lights, open your phone to easily turn off the lights. Support voice system control, free your hands and turn off lights easily in everywhere at home. Color: RGB+Warm White+Cold White Suitable for Wet Locations, perfect for new construction project: entrance, hallways, kitchens, bathrooms, closets, laundry, porches and garage work rooms and more.



FEATURES

Download the "Smart Life" or "tuya" APP to connect and enjoy intelligent control. NOTE: Only support 2.4 GHz Wi-Fi.

- 16 million colors available.
- Support Bluetooth+WIFI+Voice control.
- Control the light in groups.
- Timer function, setting lights on/off automatically.
- Multi preset scene modes and DIY scenes to fits any occasions.

INSTALLATION

No existing recessed housing or junction box required. Suitable for most new constructions. Install J-Box in ceiling beam, and insert light right into drywall opening.

DIMMING

Compatible with most triac dimmers to give user a smooth 100%-1% dimming to choose the desired brightness.

ELECTRICAL

This fixture is built with the highest quality 120V drivers, ensuring energy efficiency.

SPECIFICATION

- Model: 6EJCT13RNS
- Size: 6inch
- Wattage: 13W
- Lumens: 1100Lm
- Voltage: 120V
- Power Frequency: 60Hz
- Power Factor: >0.9
- Main Light CCT: 2700K~6500K
- Back Light CCT: RGB
- CRI: 80
- Beam Angle: 120°
- Material: AL+PS
- Lifespan: ≥50,000hours
- Operating Temp: (-4°F~ 113°F) -20~45°C
- Dimmable: Triac Dimming
- Rating: Suitable for Wet Locations
- Warranty: 5 year limited

ENERGY SAVINGS

80% more energy savings than halogen lamps.

LISTING

FCC.FCC-ID.



FCC-ID
2A9AE-6EJCT13SR-NS



Control the light in groups.




Main light Color: Warm White+Cold White

Brightness can be adjusted from 1% to 100%.


Back light Color: RGB

Brightness can be adjusted from 1% to 100%.

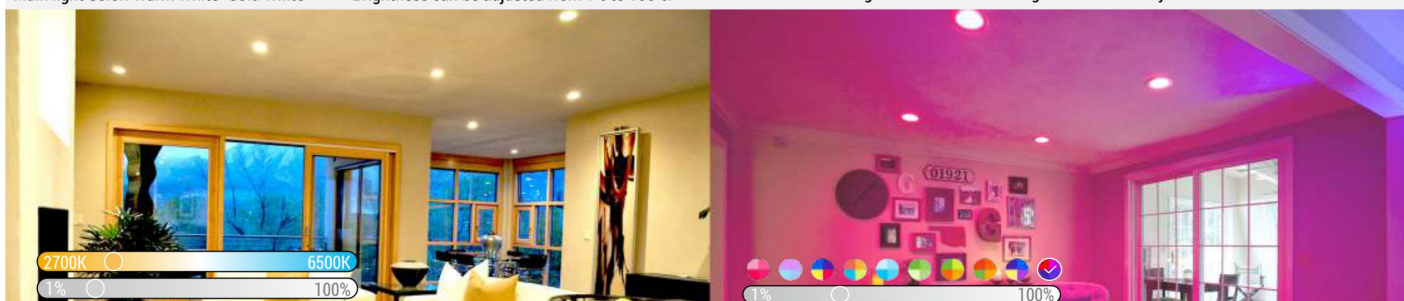


Work with Amazon Alexa / Google Home.

Timer function, setting lights on/off automatically.

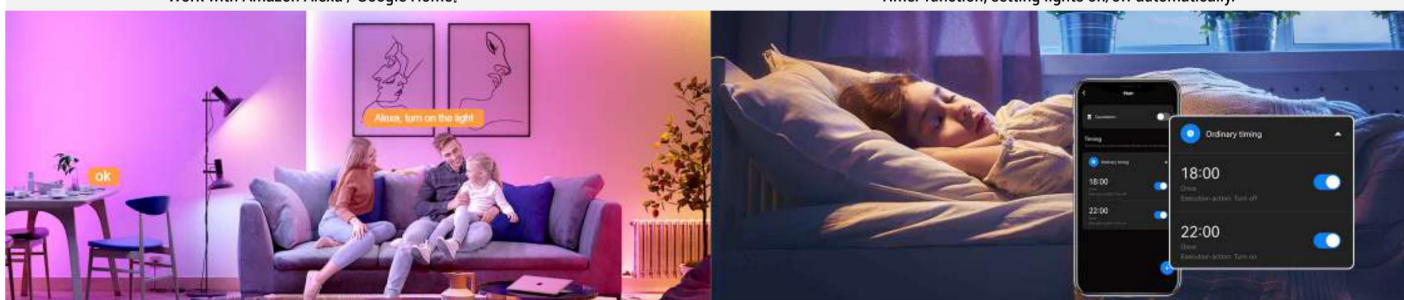


DIMENSION

SIZE & DIMENSION & HOLE SIZE

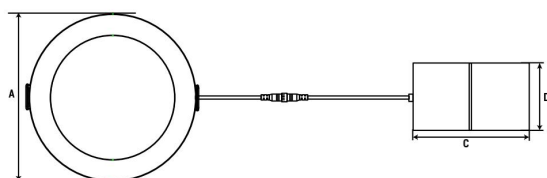

SIZE	A	B	C	D	E
4inch	Φ4.92"(125mm)	0.32"(8.2mm)	4.73"(120.1mm)	2.77"(70.4mm)	1.34"(34.1mm)
6inch	Φ6.69"(175mm)	0.32"(8.2mm)	4.73"(120.1mm)	2.77"(70.4mm)	1.34"(34.1mm)

HOLE SIZE & ACCESSORIES

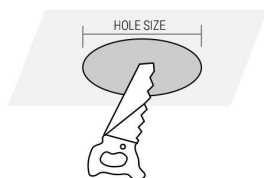

SIZE	HOLE SIZE
4inch	4 21/64"(110mm)
6inch	6 19/64"(160mm)



J-Box driver



Connector



Hole cutout card